



900 new

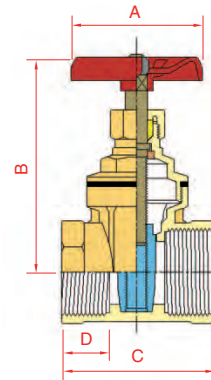
Valvola a saracinesca F.F. in ottone.
F.F. brass gate valve.



PN16



Finiture disponibili
Available finishing

 GIALLO
YELLOW



Ø	mm					
	A	B	C	D		
1/2"G	45	68	38	9	X	20-120
3/4"G	50	78	44	10	X	20-120
1"G	55	91	48	11	X	20-80
1"1/4G	60	108	51	12	X	10-60
1"1/2G	70	125	58	13	X	5-20
2"G	80	143	63	13	X	5-10
2"1/2G	90	155	64	15	X	10
3"G	100	183	75	19	X	10
4"G	120	225	85	19	X	4

IMPIEGHI: le valvole a saracinesca 900 sono adatte per impiantistica idraulica, installazioni idrotermosanitarie ed impianti di irrigazione.

APPLICATIONS: the gate valves 900 series are suitable for use in hydraulic, sanitary and irrigation plants.



Informazioni tecniche

- Pressione massima d'esercizio consigliata **16 bar.**
- Temperatura massima di utilizzo **90°C.**
- Materiali: **CW617N UNI EN 12165 - CW614N UNI EN 12164 - PTFE - Acciaio - Fibra termoresistente.**

Technical informations

- *Maximum recommended working pressure* **16 bar.**
- *Maximum using temperature* **90°C.**
- *Materials:* **CW617N UNI EN 12165 - CW614N UNI EN 12164 - PTFE - Steel - Heat resisting fibre.**

